




מאי - מרכז אטמים ישראל בע"מ

חדש במלאי

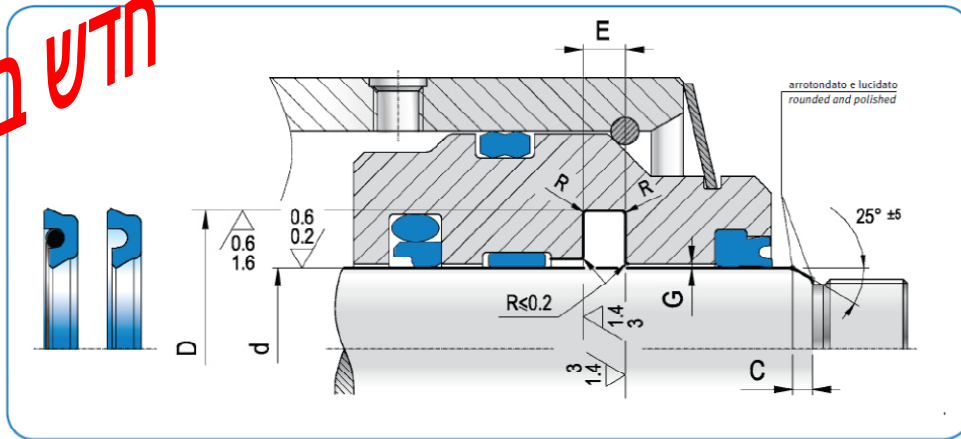

#	d _{h9}	D _{H10}	E _{+0.2}	ISC Part No.
1	25.0	36.0	4.2	US-25X36X4.2-PU
2	28.0	39.0	4.2	US-28X39X4.2-PU
3	32.0	43.0	4.2	US-32X43X4.2-PU
4	36.0	47.0	4.2	US-36X47X4.2-PU
5	40.0	51.0	4.2	US-40X51X4.2-PU
6	40.0	55.5	6.3	US-40X55.5X6.3-PU
7	45.0	56.0	4.2	US-45X56X4.2-PU
8	45.0	60.5	6.3	US-45X60.5X6.3-PU
9	50.0	61.0	4.2	US-50X61X4.2-PU
10	50.0	65.5	6.3	US-50X65.5X6.3-PU
11	55.0	66.0	4.2	US-55X66X4.2-PU
12	55.0	70.5	6.3	US-55X70.5X6.3-PU
13	56.0	67.0	4.2	US-56X67X4.2-PU
14	56.0	71.5	6.3	US-56X71.5X6.3-PU
15	63.0	74.0	4.2	US-63X74X4.2-PU
16	63.0	78.5	6.3	US-63X78.5X6.3-PU
17	65.0	80.5	6.3	US-65X80.5X6.3-PU
18	70.0	85.5	6.3	US-70X85.5X6.3-PU
19	75.0	86.0	4.2	US-75X86X4.2-PU
20	75.0	90.5	6.3	US-75X90.5X6.3-PU

#	d _{h9}	D _{H10}	E _{+0.2}	ISC Part No.
21	80.0	95.5	6.3	US-80X95.5X6.3-PU
22	90.0	105.5	6.3	US-90X105.5X6.3-PU
23	95.0	110.5	6.3	US-95X110.5X6.3-PU
24	100.0	115.5	6.3	US-100X115.5X6.3-PU
25	105.0	120.5	6.3	US-105X120.5X6.3-PU
26	110.0	125.5	6.3	US-110X125.5X6.3-PU
27	115.0	130.5	6.3	US-115X130.5X6.3-PU
28	120.0	135.5	6.3	US-120X135.5X6.3-PU
29	130.0	145.5	6.3	US-130X145.5X6.3-PU
30	135.0	150.5	6.3	US-135X150.5X6.3-PU
31	140.0	155.5	6.3	US-140X155.5X6.3-PU
32	145.0	160.5	6.3	US-145X160.5X6.3-PU
33	150.0	165.5	6.3	US-150X165.5X6.3-PU
34	160.0	175.5	6.3	US-160X175.5X6.3-PU
35	160.0	181.0	8.1	US-160X181X8.1-PU
36	180.0	195.5	6.3	US-180X195.5X6.3-PU
37	190.0	205.5	6.3	US-190X205.5X6.3-PU
38	200.0	215.5	6.3	US-200X215.5X6.3-PU
39	200.0	221.0	8.1	US-200X221X8.1-PU

- אטם מוט מותאם לחריצי I/GR, מחומר פוליאיוריתן .
- האטם מתאים לשימוש בתנאי עבודה : לחץ - עד 400 בר, מהירות - עד 0.5 מטר/שניה .

ת.ד. 6026 ראשון לציון 75437, טל: 9622564-03, פקס: 9414784-03
 P.O. BOX: 6026 Rishon Le-Zion 75437, Tel: 972-3-9622564, Fax: 972-3-9414784

E-mail: mayisc@bezeqint.net